

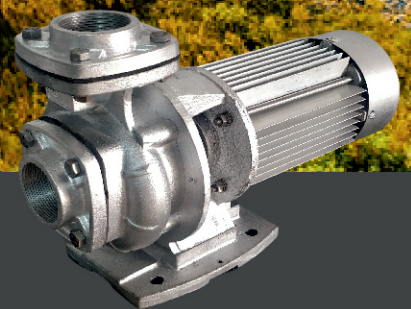


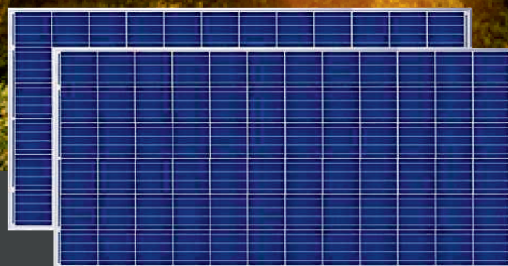

PARTH PUMPS INDIA

SOLAR SUFACE PUMPS

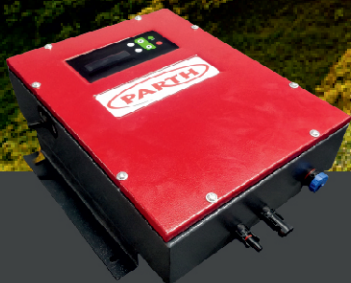

AGRICULTURE



DOMESTIC



INDUSTRIAL



SOLAR



info@parthpumpsindia.com
parthpumps@gmail.com



www.parthpumpsindia.com



23, Sanskar industrial hub-2,
bakrol, ahmedabd-382430



MODEL: PSS12D10

TECHNICAL SPECIFICATION

HEAD	10M
DISCHARGE	1,00,000
PANEL	300 X 5
POWER	1500 WATTS
LIQUID TEMPERATURE	MAX 40C
DEGREE OF PROTECTION	IP 65
MOTOR TYPE	BLDC/PMDC

CONTROLLER SPECIFICATION

MIN. DC VOLTAGE	70 V
MAX. DC VOLTAGE	450 V
MAX. DC IP CURRENT	15 A
MAX POWER AT DC SIDE	3000 WATTS
NO. OF PV STRINGS	1
EFFICIENCY	97%
DEGREE OF PROTECTION	IP 65
PROTECTION	Dry Run, Short Circuit Open Phase Input & Output High Voltage, Low Voltage Overload, Over Temperature

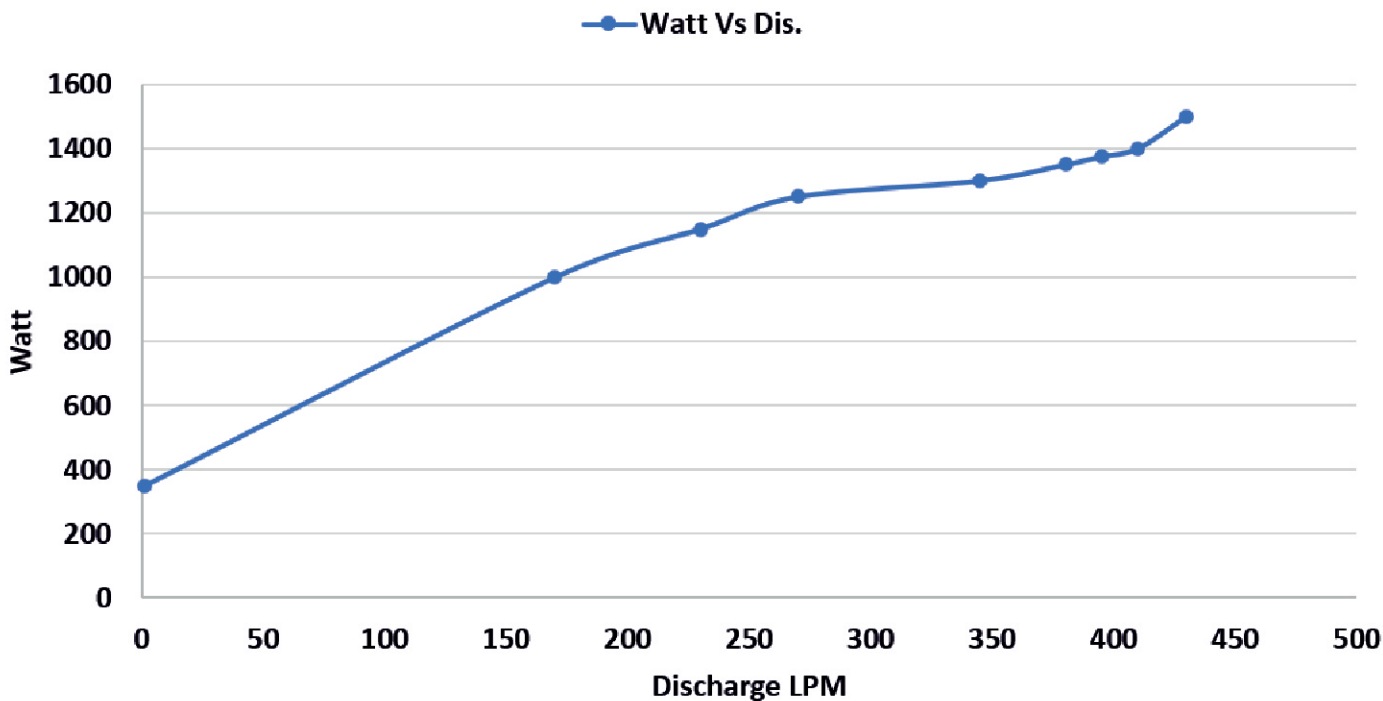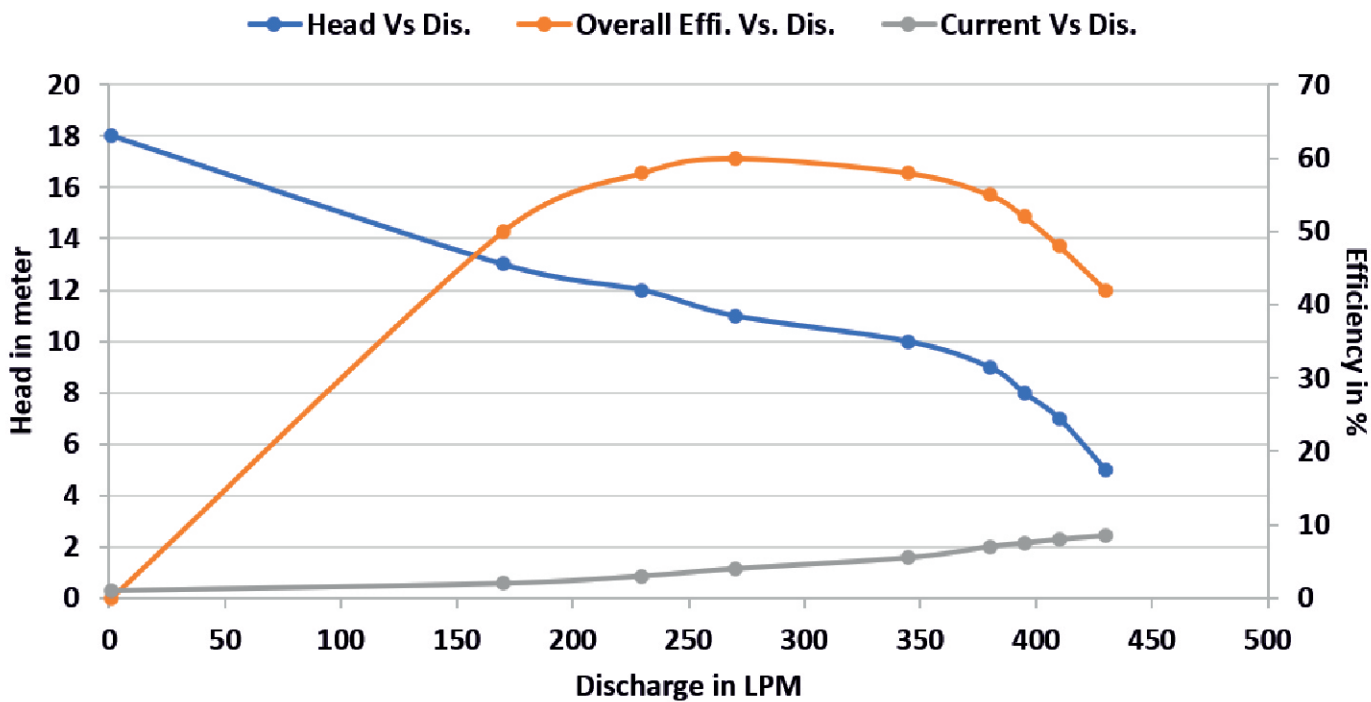



MODEL: PSS18D10

TECHNICAL SPECIFICATION

HEAD	5M;10M
DISCHARGE	3,00,000 ; 2,00,000
PANEL	300 X 7 ; 300 X 9
POWER	2100 ; 2700 WATTS
LIQUID TEMPERATURE	MAX 40C
DEGREE OF PROTECTION	IP 65
MOTOR TYPE	BLDC/PMDC

CONTROLLER SPECIFICATION

MIN. DC VOLTAGE	70 V
MAX. DC VOLTAGE	450 V
MAX. DC IP CURRENT	15 A
MAX POWER AT DC SIDE	3000 WATTS
NO. OF PV STRINGS	1
EFFICIENCY	97%
DEGREE OF PROTECTION	IP 65
PROTECTION	Dry Run, Short Circuit Open Phase Input & Output High Voltage, Low Voltage Overload, Over Temperature

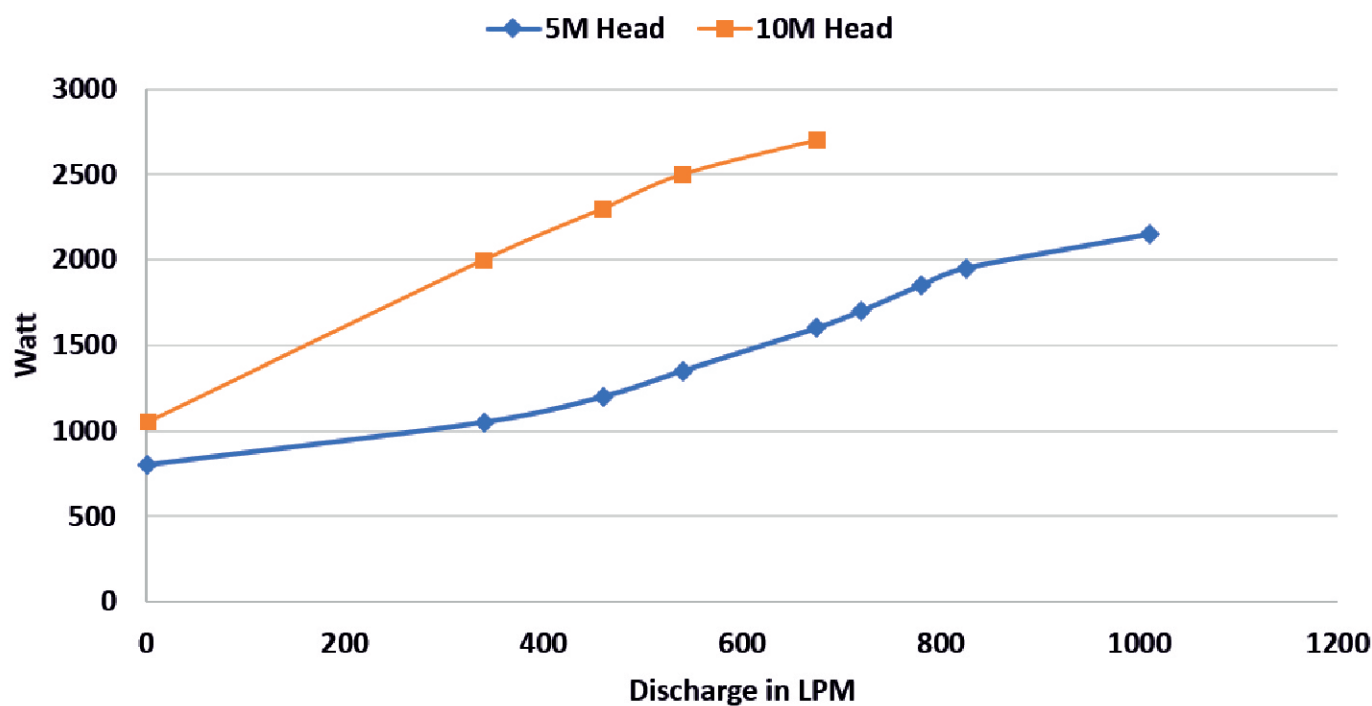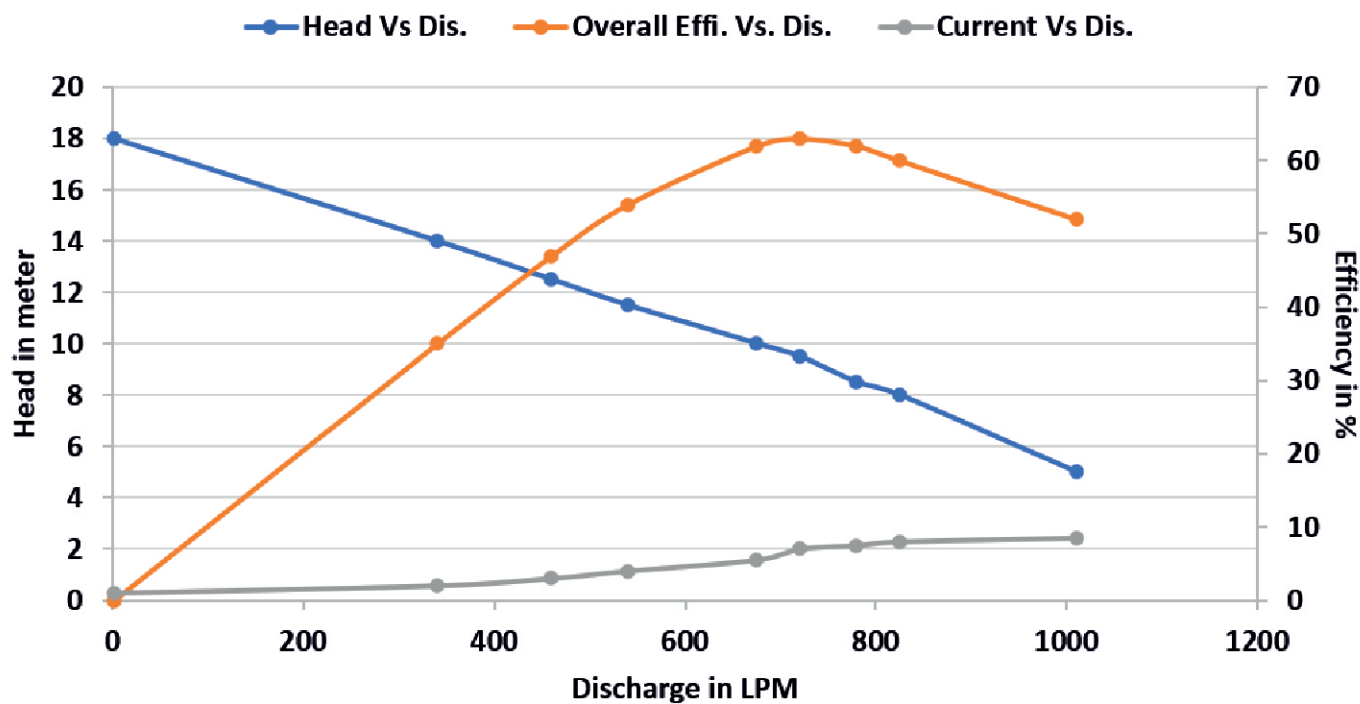

MODEL: PSS30D10

TECHNICAL SPECIFICATION

HEAD	10M ;15M
DISCHARGE	3,00,000 ; 2,00,000
PANEL	300 X 13
POWER	3900 WATTS
LIQUID TEMPERATURE	MAX 40C
DEGREE OF PROTECTION	IP 65
MOTOR TYPE	BLDC/PMDC

CONTROLLER SPECIFICATION

MIN. DC VOLTAGE	150 V
MAX. DC VOLTAGE	800 V
MAX. DC IP CURRENT	15 A
MAX POWER AT DC SIDE	4800 WATTS
NO. OF PV STRINGS	1
EFFICIENCY	97%
DEGREE OF PROTECTION	IP 65
PROTECTION	Dry Run, Short Circuit Open Phase Input & Output High Voltage, Low Voltage Overload, Over Temperature

